

MONO-PHASE WASHING MACHINES



Range for automatic parts washers with hot water and bio-degradable detergent
With revolving basket, vertical charging and electric heating, max temperature of bath 60°C



Euro LSMCA1 / 2



Euro LSMCA3




Euro LSMCA4 / 5

OPTIONALS

- Electric drying (3kW)
- Carriage for basket handling
- Vapor extraction
- Automatic tank refilling
- Oil skimmer (24V)
- Hour meter
- Weekly programming unit
- Drain pump
- External insulation
- Water circuit and stainless steel basket
- Motorized basket

NOTES

- Available without heating
- Low water level shut-off included
- Structure of stainless steel
- Supplied as assembled unit
- Technical data and dimensions are not binding and can be changed without notice

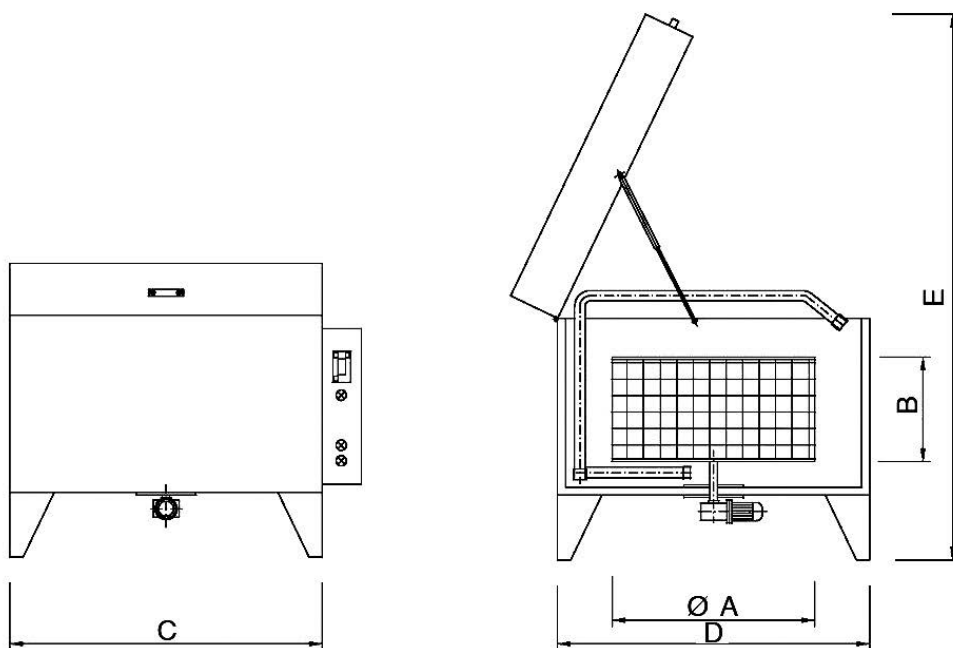

DESCRIPTION OF EQUIPMENT

Model	Useful basket dimensions		Outer dimensions		
	Ø A	B	C	D	E
Euro LSMCA1	380	340	750	680	1.360
Euro LSMCA2	600	340	880	880	1.630
Euro LSMCA3	780	500	1.075	1.190	1.740
Euro LSMCA4	910	460	1.230	1.295	1.990
Euro LSMCA5	1.150	670	1.490	1.750	2.260

TECHNICAL DATA

Model	Max. basket load	Tank capacity	Electric power pump	Flow ratio pump	Pump pressure	Thermal power	Temperature adjustment	Time adjustment	Total electric power	Weight
	kg	liters	kW	l/min	bar	kW	°C	min	kW	kg
Euro LSMCA1	70	40	0,55	65	2,5	2	0 ÷ 60°	0 ÷ 60'	2,55	50
Euro LSMCA2	100	80	0,55	70	2,4	3	0 ÷ 60°	0 ÷ 60'	3,55	60
Euro LSMCA3	150	85	0,75	90	2,4	4	0 ÷ 60°	0 ÷ 60'	4,75	80
Euro LSMCA4	200	175	2 x 1	2 x 110	2,5	6	0 ÷ 60°	0 ÷ 60'	7,8	150
Euro LSMCA5	350	280	2 x 1,5	2 x 180	2,3	10	0 ÷ 60°	0 ÷ 60'	13	250