


WASHING DRYING LINES WITH SPAN CONVEYOR



“ Three-phase range – Methane and/or GPL burner – Maximum temperature of the degreasing bath 60 °C –
Maximum temperature oven 100 °C”

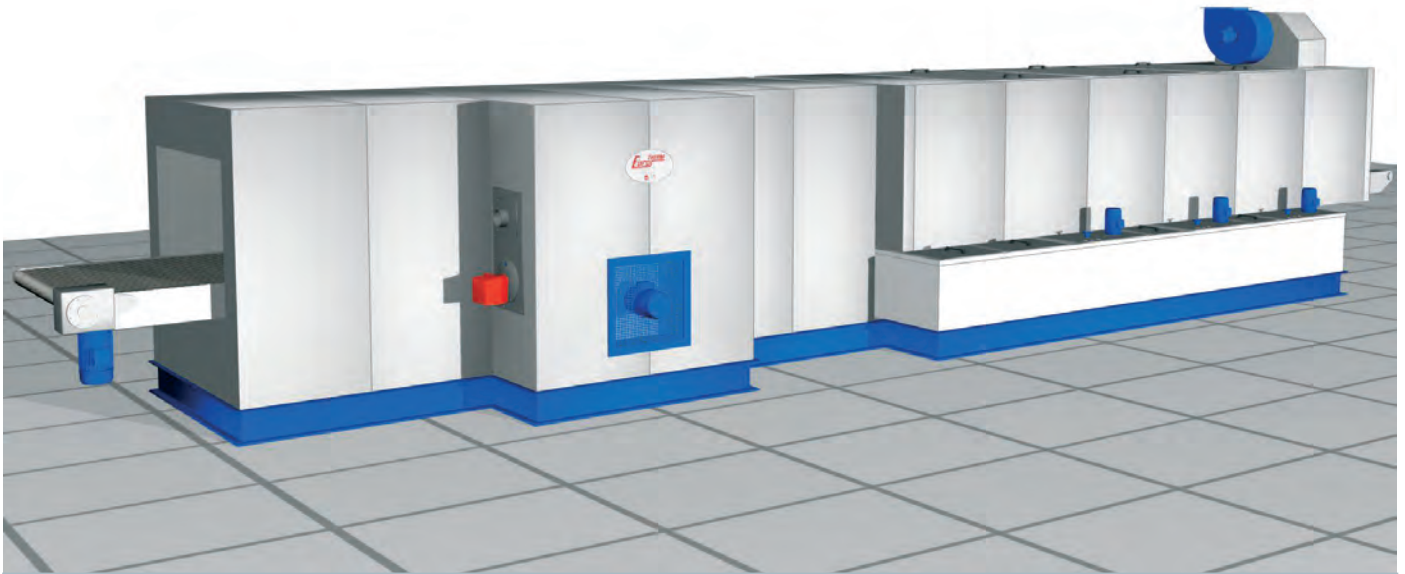


OPTIONAL ACCESSORIES

- Variation of the capacity and speed of the conveyor
- Variation of the dimensions
- Gas oil burner
- Mechanical and electrical assembly at destination

NOTES

- Technical characteristics and dimensions are given as indication and can be changed for their improvement
- Carried out in stainless steel, external reinforcements made of steel painted, span conveyor made of stainless steel wire mesh 12 x 17
- Pre-assembled supply

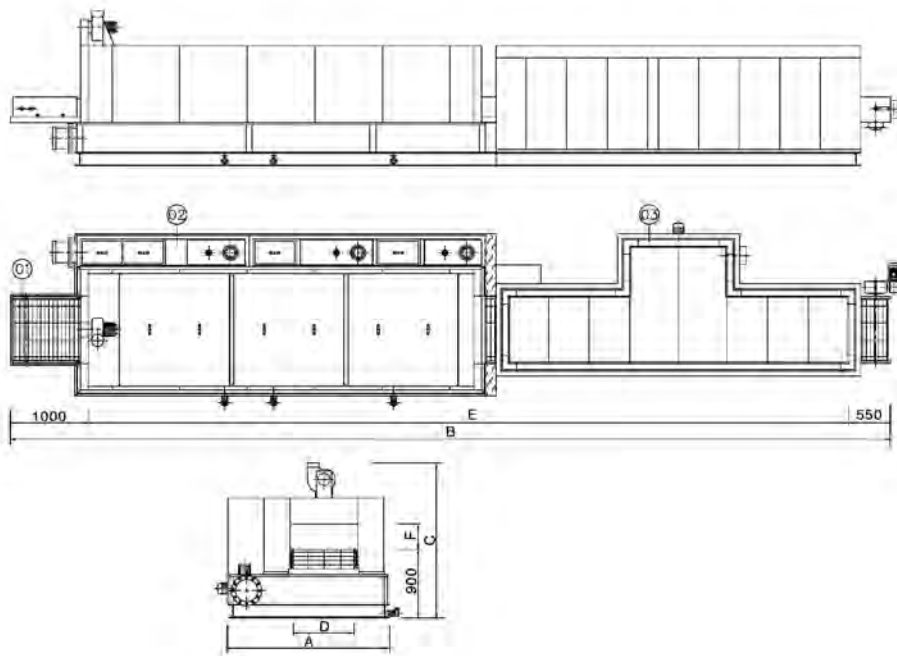

- 01 – Span conveyor
- 02 – Washing machine
- 03 - Drying oven

EQUIPMENT IDENTIFICATION

Model	Overall dimensions (mm)			Useful dimensions (mm)		
	A	B	C	D	E	F
Euro LLATT1	1.620	11.750	2.400	300	10.200	300
Euro LLATT2	1.820	11.750	2.400	500	10.200	300
Euro LLATT3	2.120	11.750	2.600	800	10.200	500
Euro LLATT4	2.320	11.750	2.600	1.000	10.200	500
Euro LLATT5	2.520	11.750	2.600	1.200	10.200	500

TECHNICAL CHARACTERISTICS

CYCLE PHASES

Model	Conveyor velocity	Conveyor capacity	Total electrical power	Total thermal duty	Burners	Extraction fans	Degreasing Temperature bath 60°C	Rinsing Temperature bath °C ambient	Rinsing Temperature bath °C ambient	Drying Temperature 100 °C
	m/minutes	kg/m ²	kW	kCal/h	n°	n°	minutes	minutes	minutes	minutes
Euro LLATT1	0,50	30	10,5	80.000	2	4	2	1	0,5	8
Euro LLATT2	0,50	30	14	95.000	2	4	2	1	0,5	8
Euro LLATT3	0,50	50	16,5	110.000	2	4	2	1	0,5	8
Euro LLATT4	0,50	70	16,5	120.000	2	4	2	1	0,5	8
Euro LLATT5	0,50	70	17	140.000	2	4	2	1	0,5	8