


CONTAINER FOR THE STORAGE OF NON-CORROSIVE PAINT AND LIQUIDS



“ Range at one level, with tank recovery ”

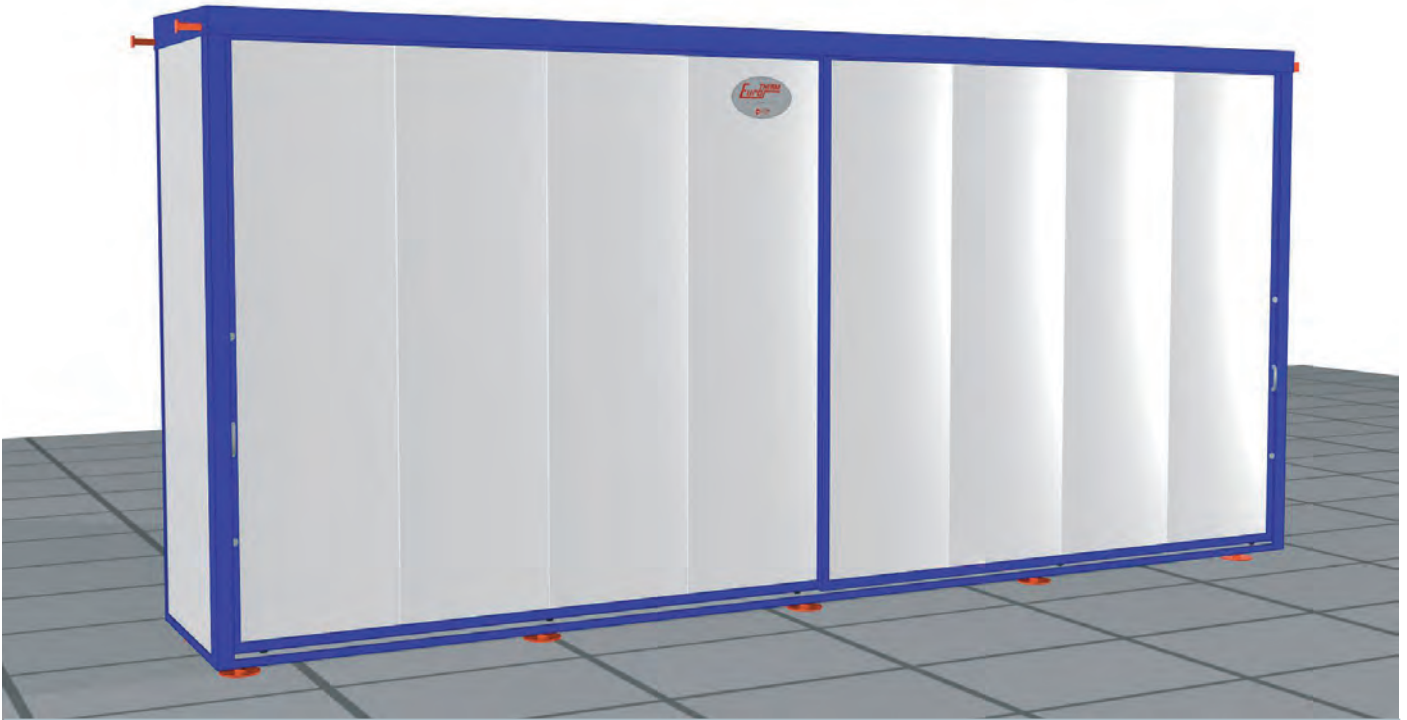


OPTIONAL ACCESSORIES

- Adaptation at different conveyor speeds
- Change of the washing cycle phases
- Change of the shape as needed
- Gas oil burners
- Electric control board

NOTES

- Technical characteristics and dimensions are given as indication and can be changed for their improvement
- Carried out in stainless steel, external reinforcements made of painted steel
- Insulation hot tub with mineral wool thickness 50 and density 100 kg/m³
- Pre-assembled supply

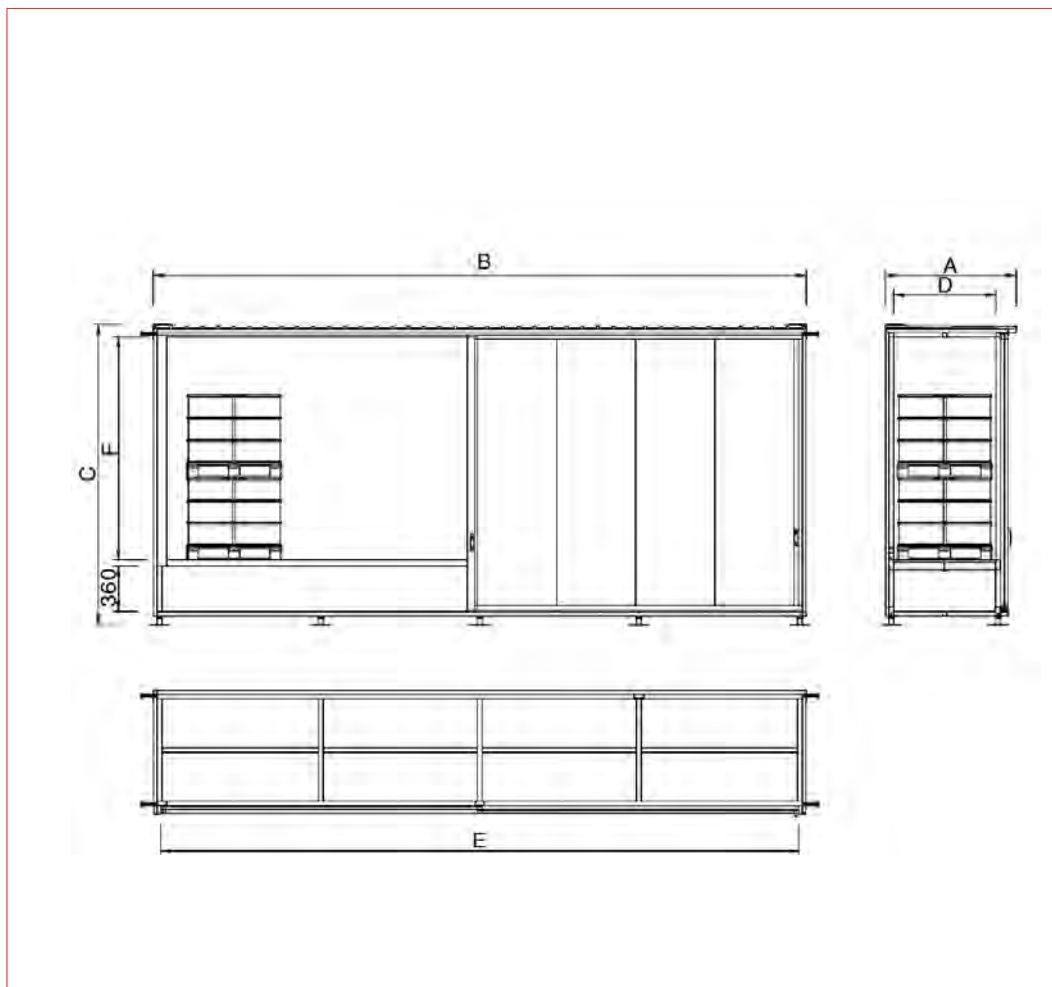

EQUIPMENT IDENTIFICATION

Model	Useful dimensions (mm)			Overall dimensions (mm)		
	A	B	C	D	E	F
Euro C5	1.660	3.240	2.820	1.350	2.900	2.200
Euro C6	1.660	4.540	2.820	1.350	3.900	2.200
Euro C7	1.660	8.260	2.820	1.350	7.900	2.200

TECHNICAL CHARACTERISTICS

Model	200-litre drums n°	Volume m ³	Tank capacity m ³
Euro C5	16	3,20	1,00
Euro C6	24	4,80	1,60
Euro C7	48	9,60	3,20