



## CONTAINER FOR THE STORAGE OF NON-CORROSIVE PAINT AND LIQUIDS

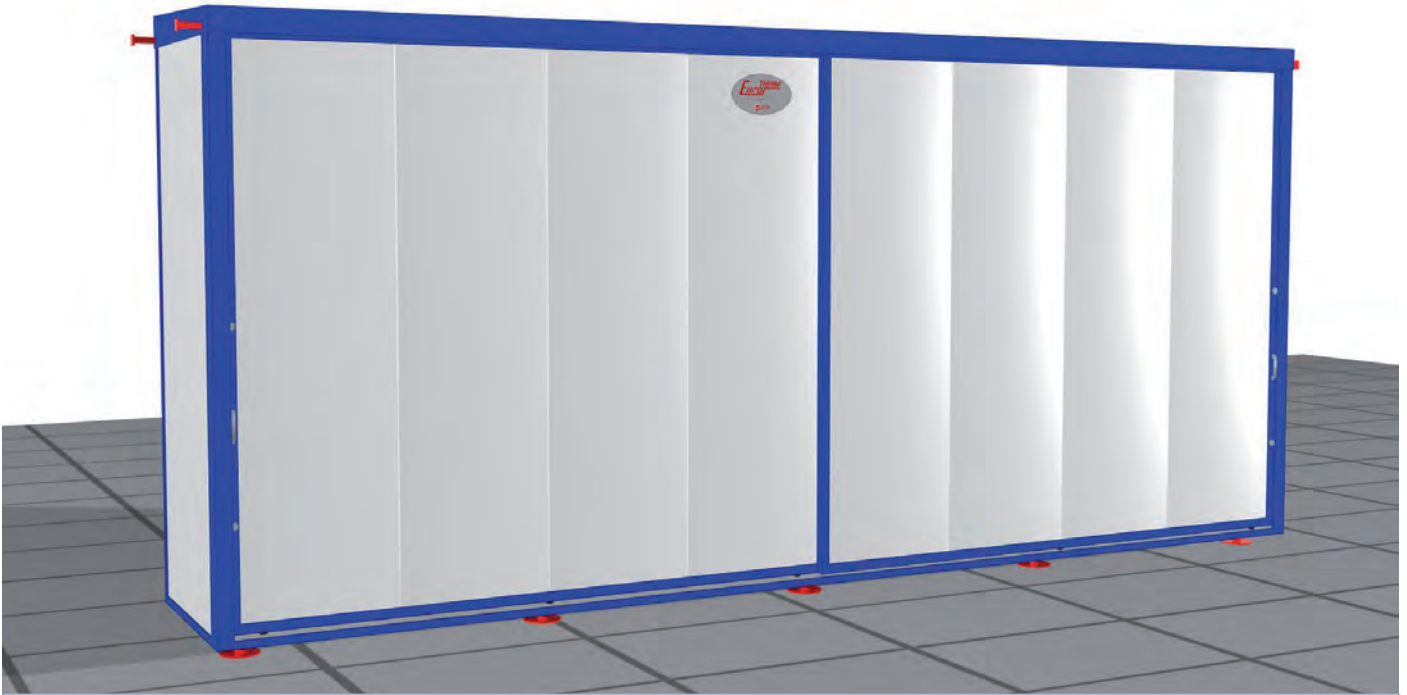

“ Range at two levels, one access with tank recovery ”

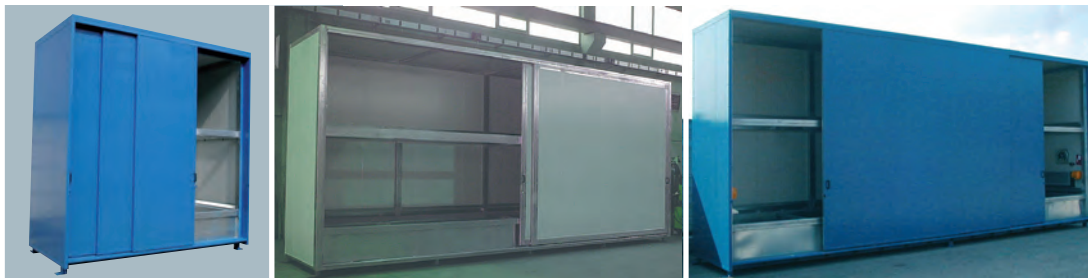


### OPTIONAL ACCESSORIES

- Thickness insulated walls 50 or 100 mm
- Fire-fighting equipment
- Heating system
- Cooling system
- Forced ventilation
- Carried out in stainless steel

### NOTES

- Technical characteristics and dimensions are given as indication and can be changed for their improvement
- Carried out in galvanized metal sheet, in pre-painted galvanized metal sheet, painted steel
- Suited for storage pallets: 800 x 1200 x 1200 h, weight 1000 kg
- Sliding door with lock
- Natural ventilation
- Pre-assembled supply

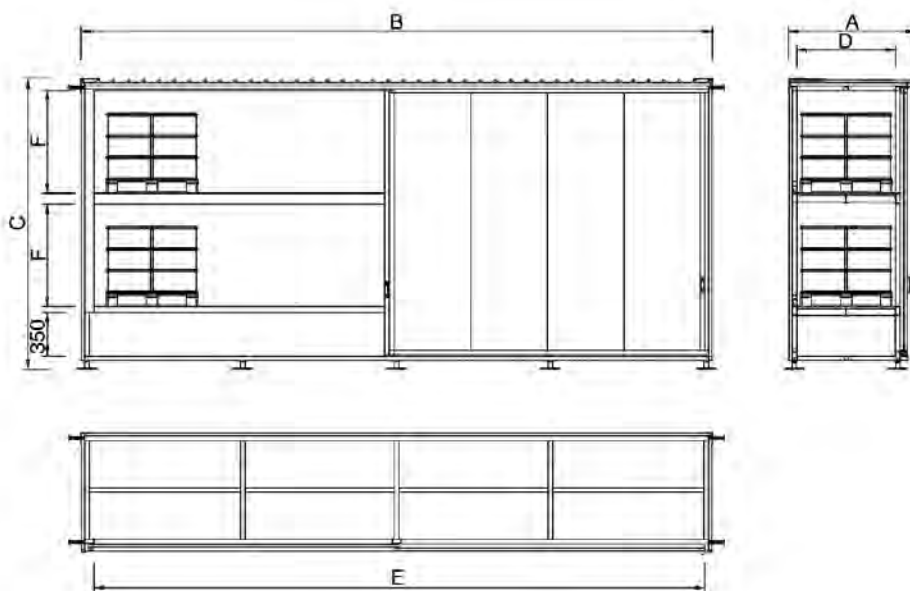

### EQUIPMENT IDENTIFICATION

Model	Overall dimensions (mm)			Useful dimensions (mm)		
	A	B	C	D	E	F
Euro C1	1.660	3.240	3.310	1.350	2.900	1.300
Euro C2	1.660	4.540	3.310	1.350	3.900	1.300
Euro C3	1.660	8.260	3.310	1.350	7.900	1.300

### TECHNICAL CHARACTERISTICS

Model	200-litre drums	Volume	Tank capacity
	n°	m³	m³
Euro C1	16	3,20	1,00
Euro C2	24	4,80	1,60
Euro C3	48	9,60	3,20