

AIR HEATING UNITS



“ Range with indirect heating air/hot water
Thermal duty will be defined in accordance with the terms of use”



OPTIONAL ACCESSORIES

Electric control board

NOTES


Technical characteristics and dimensions are given as indication and can be changed for their improvement

The dimensions and values indicated by “nd” will be determined in accordance with the terms of use

Carried out in galvanized metal sheet and in pre-painted galvanized metal sheet

Insulation in mineral wool density 100 kg/m³

Pre-assembled supply

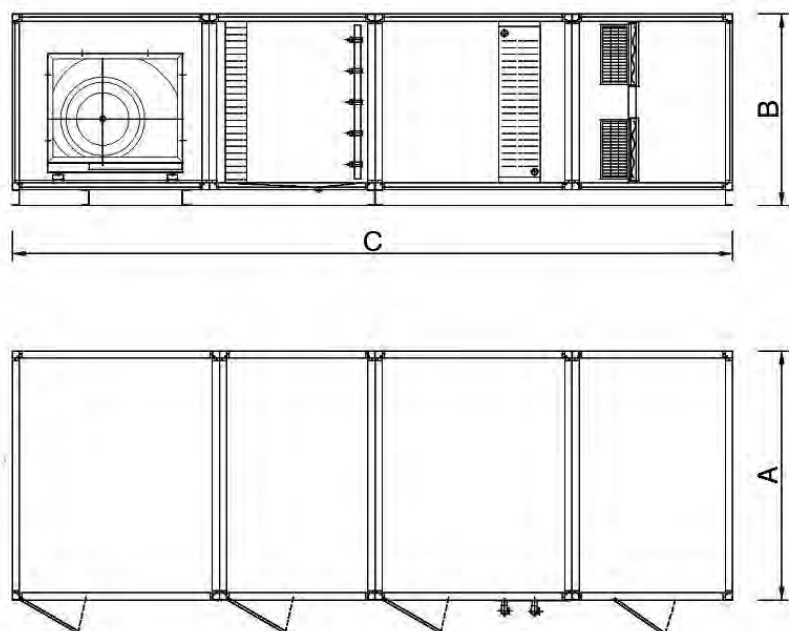

EQUIPMENT IDENTIFICATION

Model	Overall dimensions (mm)		
	A	B	C
Euro CTAA1	1.150	1.700	nd
Euro CTAA2	1.700	1.700	nd
Euro CTAA3	1.700	2.000	nd
Euro CTAA4	2.100	2.000	nd
Euro CTAA5	2.100	2.400	nd
Euro CTAA6	2.400	2.700	nd
Euro CTAA7	2.400	3.300	nd
Euro CTAA8	2.400	4.200	nd
Euro CTAA9	2.400	5.000	nd

TECHNICAL CHARACTERISTICS

Model	Air capacity	Thermal duty	Fans	Electrical power
	m³/h	kW	n°	kW
Euro CTAA1	8.000	nd	nd	nd
Euro CTAA2	15.000	nd	nd	nd
Euro CTAA3	20.000	nd	nd	nd
Euro CTAA4	25.000	nd	nd	nd
Euro CTAA5	30.000	nd	nd	nd
Euro CTAA6	50.000	nd	nd	nd
Euro CTAA7	80.000	nd	nd	nd
Euro CTAA8	100.000	nd	nd	nd
Euro CTAA9	120.000	nd	nd	nd