


## CYCLONES SEPARATOR



“ Range with vibrating screen powder”

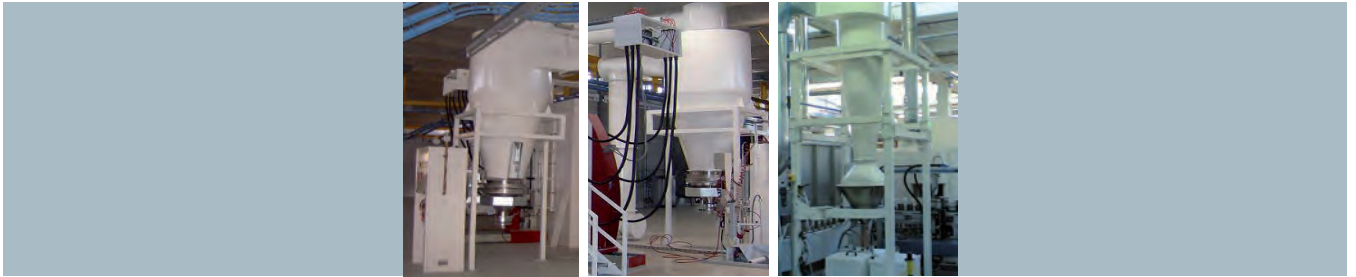

### OPTIONAL ACCESSORIES

Fitting for connection to the suction unit


Stainless steel construction

### NOTES

Technical characteristics and dimensions are given as indication and can be changed for their improvement

Carried out in painted steel

Pre-assembled supply

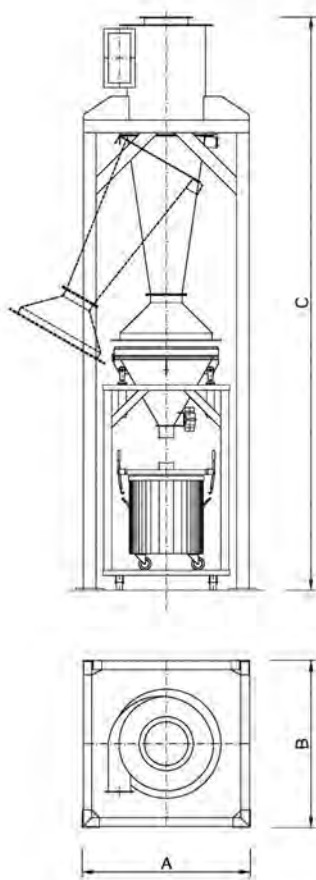

### EQUIPMENT IDENTIFICATION

| Model     | Overall dimensions (mm) |       |       |
|-----------|-------------------------|-------|-------|
|           | A                       | B     | C     |
| Euro CLV1 | 1.100                   | 1.100 | 3.696 |
| Euro CLV2 | 1.240                   | 1.240 | 3.750 |
| Euro CLV3 | 1.480                   | 1.480 | 4.078 |
| Euro CLV4 | 1.630                   | 1.630 | 4.518 |
| Euro CLV5 | 1.830                   | 1.830 | 5.524 |
| Euro CLV6 | 2.030                   | 2.030 | 5.554 |

### TECHNICAL CHARACTERISTICS

| Model     | Diameter of cyclone | Air capacity      | Dust container capacity |
|-----------|---------------------|-------------------|-------------------------|
|           | mm                  | m <sup>3</sup> /h | litres                  |
| Euro CLV1 | 905                 | 8000              | 25                      |
| Euro CLV2 | 1006                | 9000              | 25                      |
| Euro CLV3 | 1255                | 12000             | 25                      |
| Euro CLV4 | 1400                | 16000             | 50                      |
| Euro CLV5 | 1624                | 20000             | 50                      |
| Euro CLV6 | 1800                | 24000             | 50                      |