

PRESSURIZED PAINTING BOOTHS WITH DRY FILTRATION



Industrial range with airflow semi-vertical




OPTIONAL ACCESSORIES

Waterproof neon light, 1600 mm length, IP 65, 2 neon 58 W (2 lamps each 2 m of cabin length)
Lifting platform operators
Differential manometer
Electrical control board

NOTES

Technical characteristics and dimensions are given as indication and open to improvement
Carried out in galvanized metal sheet, in pre-painted galvanized metal sheet, and painted steel
Thickness of the insulating panels 50 mm
Useful dimensions main gate mm: 4000 x 4000 h
Pedestrian door dimensions mm: 1000 x 2100 h
Heater with heat exchanger air/combustion fumes. Burners gas and/or gas oil
Double filtration: 1st filter in cardboard then 2nd filter in glass fibres
Temperature in painting phase 18°C, in oven phase 60°C
Spare parts supplied in kit

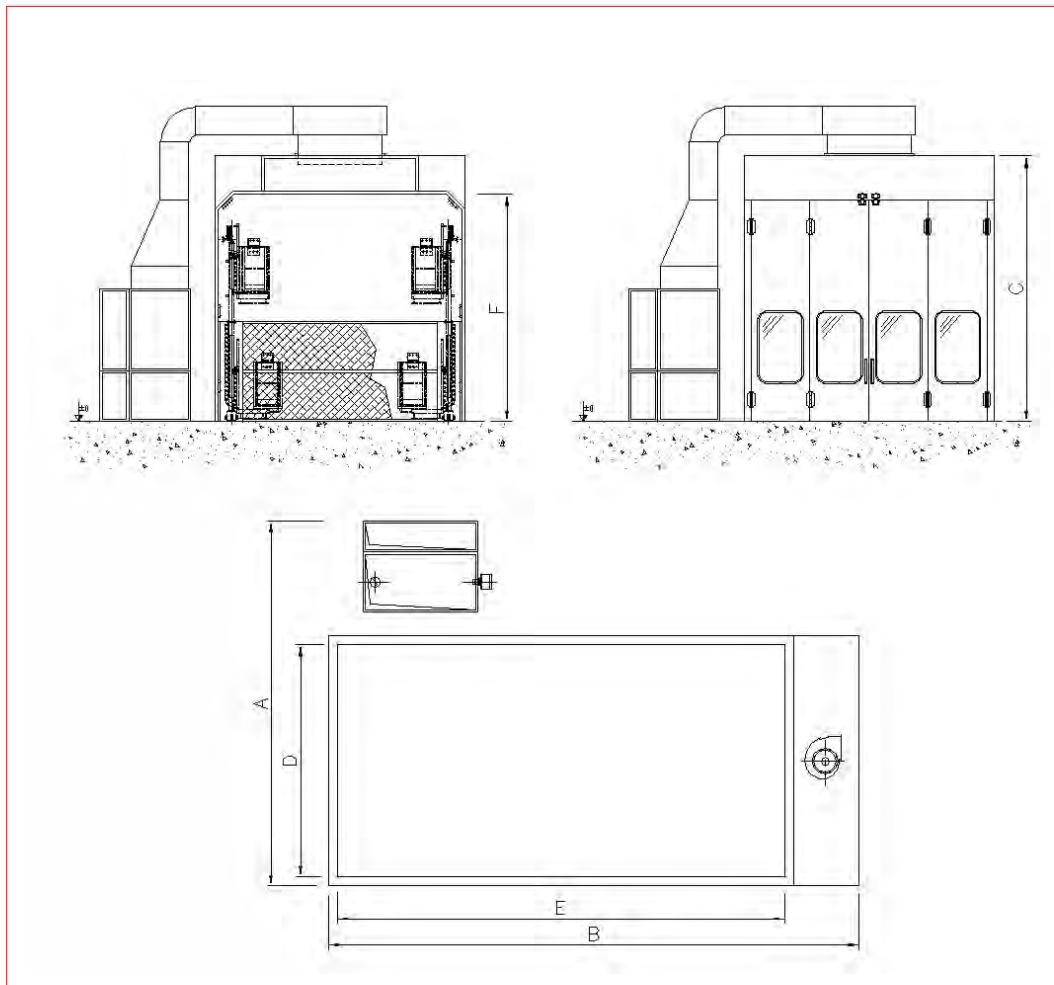

TECHNICAL CHARACTERISTICS

Model	Overall dimensions (mm)			Useful dimensions (mm)		
	A	B	C	D	E	F
Euro 8IPSV	7.350	9.000	6.000	5.000	8.000	5.000
Euro 10IPSV	7.350	11.000	6.000	5.000	10.000	5.000
Euro 12IPSV	7.350	13.000	6.000	5.000	12.000	5.000
Euro 15IPSV	7.350	17.000	6.000	5.000	16.000	5.000
Euro 18IPSV	7.350	19.000	6.000	5.000	18.000	5.000
Euro 20IPSV	7.350	21.000	6.000	5.000	20.000	5.000
Model	Air capacity	Extraction fans	Electrical power	Thermal duty	Input fans	Electrical power
	m³/h	n°	kW	kCal/h	n°	kW
Euro 8IPSV	35.000	2	5,5	260.000	1	11
Euro 10IPSV	35.000	2	5,5	260.000	1	11
Euro 12IPSV	35.000	2	5,5	260.000	1	11
Euro 15IPSV	35.000	2	5,5	260.000	1	11
Euro 18IPSV	35.000	2	5,5	260.000	1	11
Euro 20IPSV	35.000	2	5,5	260.000	1	11