

PRESSURIZED BOOTHS WITH DRY FILTRATION



“ Professional range with semi-vertical airflow ”




OPTIONAL ACCESSORIES

Supply of spray booth with water veil filtration on request
Waterproof neon light IP 65, 2 neon of 36 W (2 lamps each 2 m of cabin length)
Differential manometer
Electrical control board

NOTES

Technical characteristics and dimensions are given as indication and open to improvement
Carried out in galvanized metal sheet, in pre-painted galvanized sheet metal, and painted steel
Thickness of the insulating panels 50 mm
Dimensions of the sliding gate mm: 2000 x 2100 h
Dimensions of the pedestrian door mm: 1000 x 2100 h
Heater with heat exchanger air/combustion fumes. Burners gas and/or gas oil
Double filtration: 1st filter in cardboard then 2nde filter in glass fibres
Spare parts supplied in kit

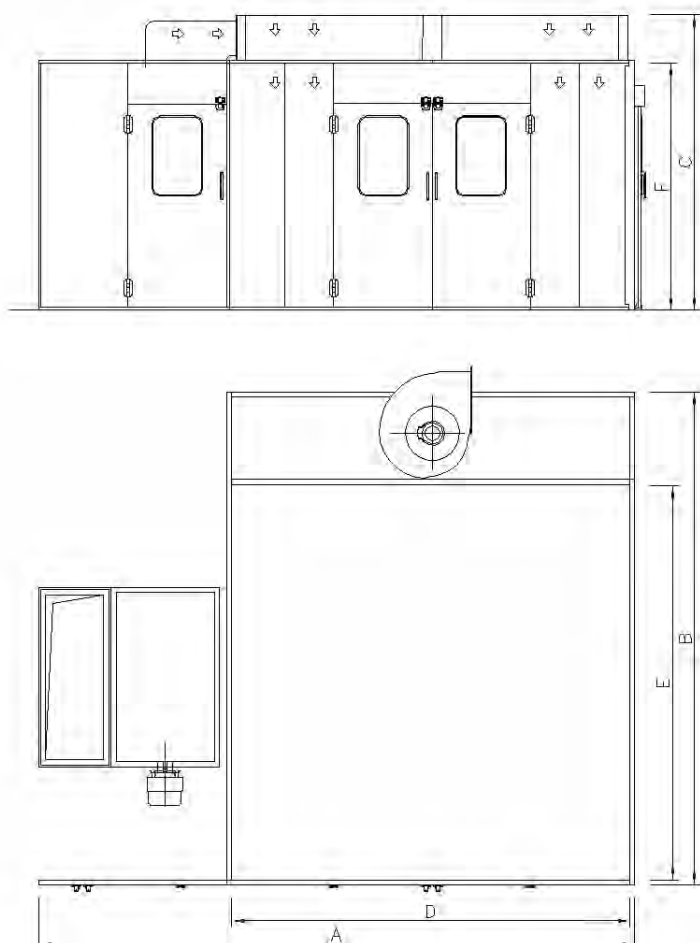

TECHNICAL CHARACTERISTICS

Model	Overall dimensions (mm)			Useful dimensions (mm)		
	A	B	C	D	E	F
Euro 4 PSV4	5.300	4.840	3.050	4.000	4.000	2.500
Euro 4 PSV6	5.300	6.840	3.050	4.000	6.000	2.500
Euro 4 PSV8	5.300	8.840	3.050	4.000	8.000	2.500
Euro 6 PSV6	7.300	6.840	3.050	6.000	6.000	2.500
Euro 6 PSV8	7.300	8.840	3.050	6.000	8.000	2.500
Euro 6 PSV10	7.300	10.840	3.050	6.000	10.000	2.500
Euro 6 PSV12	7.300	12.840	3.050	6.000	12.000	2.500

Model	Air capacity	Extraction fans	Electrical power	Thermal duty	Input fans	Electrical power
	m³/h	n°	kW	kCal/h	n°	kW
Euro 4 PSV4	22.500	2	2,2	160.000	1	4
Euro 4 PSV6	22.500	2	2,2	160.000	1	4
Euro 4 PSV8	22.500	2	2,2	160.000	1	4
Euro 6 PSV6	28.000	2	4	200.000	1	7,5
Euro 6 PSV8	28.500	2	4	200.000	1	7,5
Euro 6 PSV10	28.500	2	4	200.000	1	7,5
Euro 6 PSV12	28.500	2	4	200.000	1	7,5