

PRESSURIZED BOOTHS FOR LIQUID PAINTING WITH OVEN FUNCTION




**Pressurized booth specially for car body repair
With vertical airflow and oven mode**



Standard spray booth



Standard booth inside

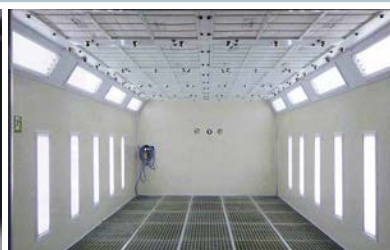

With complete grid floor




Working

OPTIONAL ACCESSORIES

- Intake duct of air generator
- Vapor exhaust chimney
- Combustion fumes chimney

NOTES

- Booth does not require masonry
- Chimneys to be provided by the customer
- CE control panel included
- 8 Lamps in the roof IP 65 with 4 x 36 W Neon tubes each
- 8 Lamps in side walls IP 65 with 4 x 36 W Neon tubes each
- Made of galvanized steel sheet, isolating layer 50 mm, density 160 kg/m³
- Main door with folding wings + escape door
- Heating with heat exchanger air/fumes
- Gas or oil burner
- Underfloor extraction with fiberglass filters, intake air filtration with synthetic fabric filters
- Supplied as assembly kit
- Technical characteristics and dimensions are given as indication and can be changed for improvement or update without notice

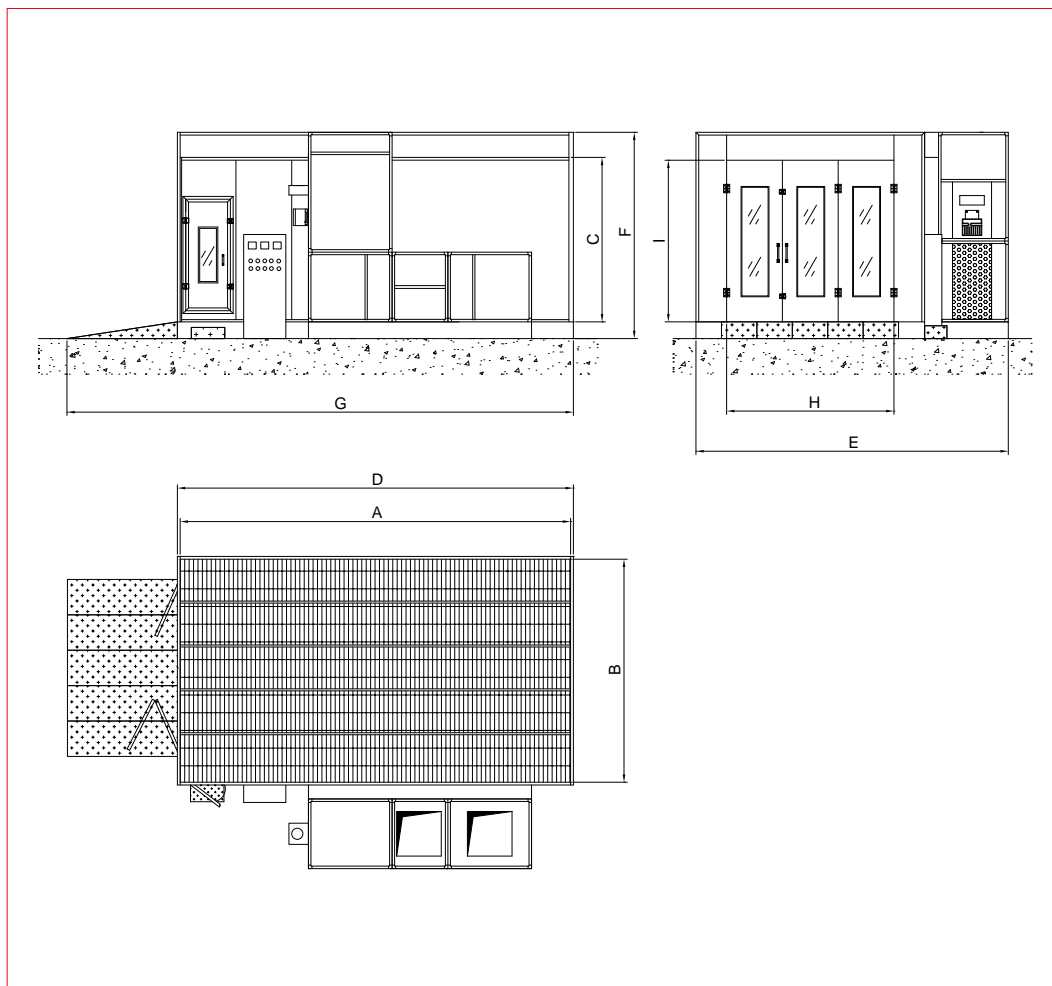

DESCRIPTION OF EQUIPMENT

Model	Useful dimensions			Overall dimensions				Main door dimensions	
	A	B	C	D	E	F	G	H	I
Euro CAR	6.900	3.900	2.650	7.000	6.200	3.650	7.900	3.000	2.600

TECHNICAL DATA

Model	Air intake fan	Intake flow rate	Intake fan electric power	Air extraction fan	Extraction flow rate	Extraction fan electric power	Burners	Heat power	Max. working temperature	Lighting electric power	Doors	Total power input
	n°	m³/h	kW	n°	m³/h	kW	n°	kCal/h	°C	kW	n°	kW
Euro CAR	1	30.000	11	1	30.000	11	1	260.000	80	2,5	2	24,5