

COMPOSED MODULES: PRESSURIZED BOOTH WITH DRY FILTRATION AND OVEN FUNCTION



“ Professional range ”




OPTIONAL ACCESSORIES

- Supply of spray booth with water veil filtration on request
- Waterproof neon light IP 65, 2 neon of 36 W (2 lamps each 2 m of cabin length)
- Differential manometer
- Electrical control board

NOTES

- Technical characteristics and dimensions are given as indication and open to improvement
- Carried out in galvanized metal sheet, in pre-painted galvanized metal sheet, and painted steel
- Thickness of the insulating panels 50 mm
- Dimensions of the sliding gate mm: 2000 x 2100 h
- Heater with heat exchanger air/combustion fumes. Burners gas and/or gas oil
- Double filtration: 1rst filter in cardboard then 2nde filter in glass fibres
- Spare parts supplied in kit

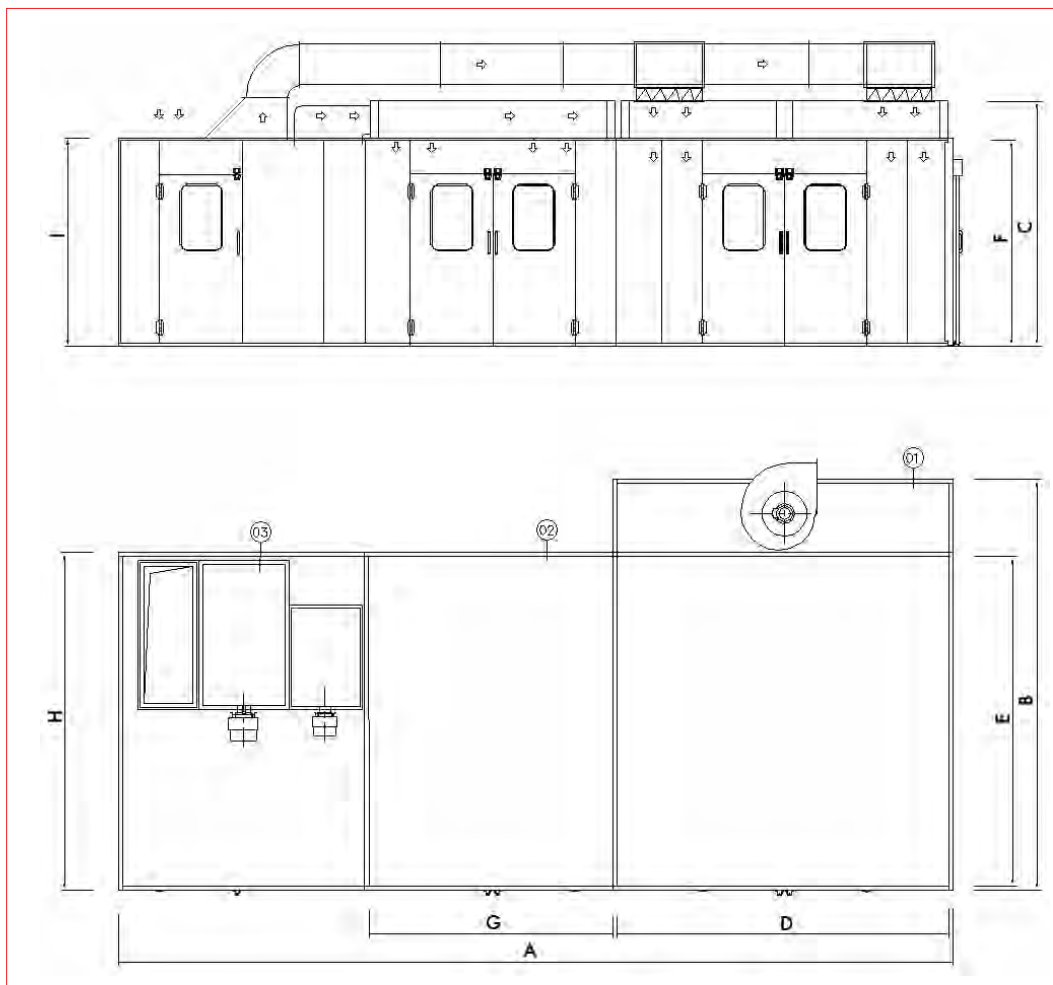

- 01 Painting spray booth
- 02 Cooking oven
- 03 Heating unit for booth and oven

EQUIPMENT IDENTIFICATION

Model	Overall dimensions (mm)								
	A	B	C	D	E	F	G	H	I
Euro CVF3	7.200	3.840	3.780						
Euro CVF4	9.700	4.840	3.780						
Euro CVF6	12.700	6.840	3.780						
				Booth useful dimensions (mm)			Oven useful dimensions (mm)		
Euro CVF3				3.000	3.000	2.500	2.000	3.000	2.500
Euro CVF4				4.000	4.000	2.500	3.000	4.000	2.500
Euro CVF6				6.000	6.000	2.500	4.000	6.000	2.500
Model	Air capacity m³/h	Extraction and/or air recycling fans n°	Electrical power kW	Thermal duty kCal/h	Input fans n°	Electrical power kW	Burners n°	Access door n°	
	BOOTH TECHNICAL CHARACTERISTICS								
Euro CVF3	12.000	1	4	85.000	1	4	1	2	
Euro CVF4	16.000	2	2,2	110.000	1	4	1	2	
Euro CVF6	22.500	2	3	160.000	1	5,5	1	2	
	OVEN TECHNICAL CHARACTERISTICS								
Euro CVF3	3.000	1	1,1	40.000			1	2	
Euro CVF4	6.000	1	1,5	60.000			1	2	
Euro CVF6	8.000	1	2,2	80.000			1	2	