


POWDER PAINTING INSTALLATION



Burners methane and/or g.p.l. – Maximum temperature of powder polymerisation 200°C
Manual grit blasting booth – Manual powder painting booth – Manual conveyor

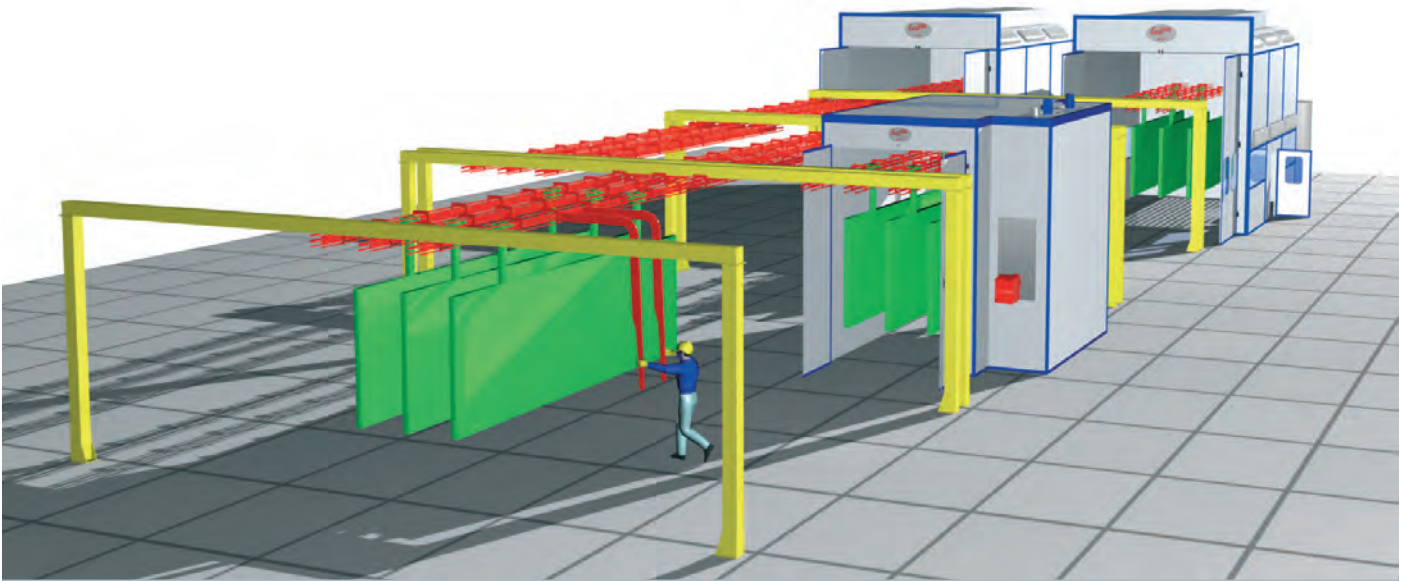


OPTIONAL ACCESSORIES

Variation conveyor capacity
Burners gas oil
Mechanical and electrical assembly

NOTES

Technical characteristics and dimensions are given as indication and open to improvement
Powder painting booth and oven carried out in galvanized metal sheet, structure and conveyor in painted steel
Oven insulation in mineral wool, thickness 150 mm, density 100kg/m³
Spare parts supplied in kit

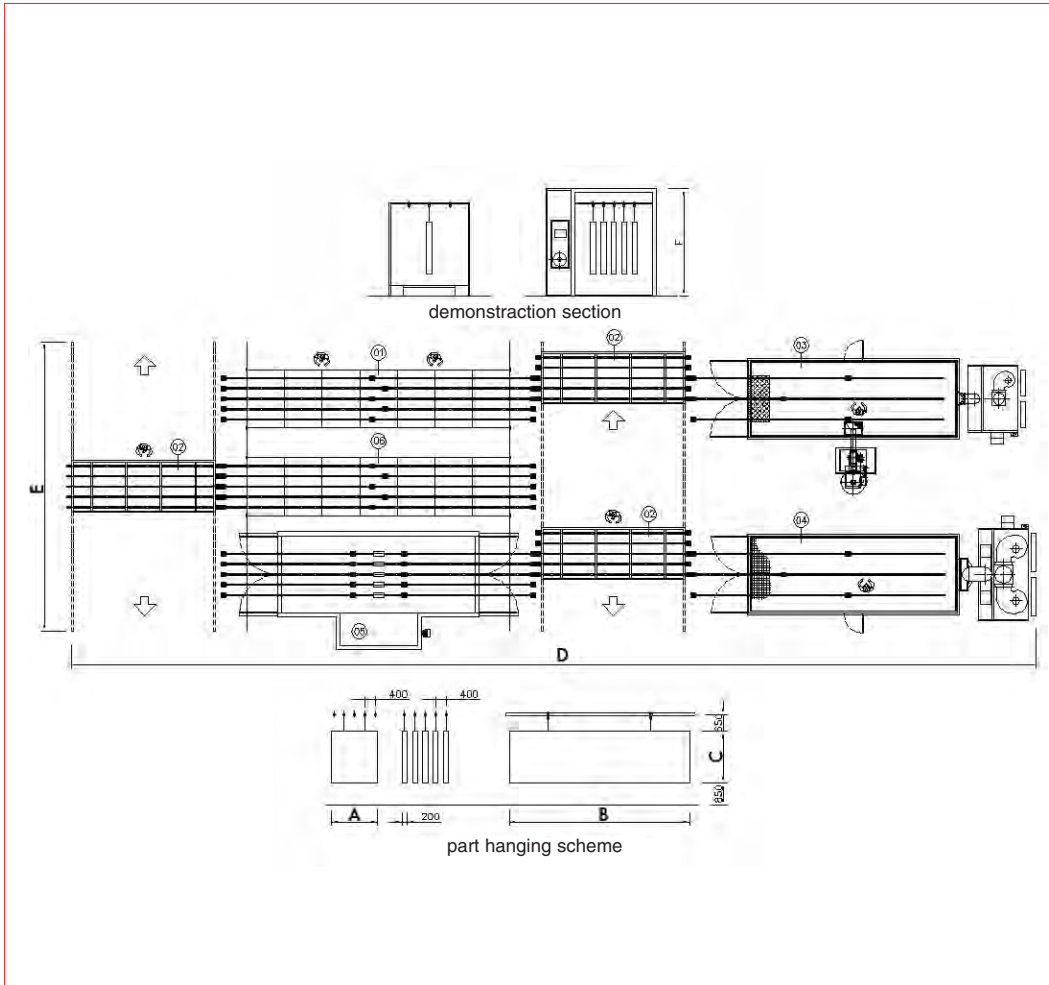

- 01 Loading and unloading position
- 02 Manual conveyor
- 03 Grit blasting booth
- 04 Powder painting booth
- 05 Polymerisation oven
- 06 Storage area

TECHNICAL CHARACTERISTICS

Model	Useful dimensions (mm)			Overall dimensions of the installation (mm)		
	A	B	C	D	E	F
Eurolarg1P1	1.800	7.000	2.000	37.500	11.200	4.200
Model	Manual conveyor	Conveyor loading	Total electrical power	Total thermal duty	Burners	Exhaust chimney
	n°	kg/metre	kW	kCal/h	n°	n°
Eurolarg1P1	3	50	29	250.000	1	4