


## MANUAL SANDING BOOTS



### Range with self cleaning filter cartridges

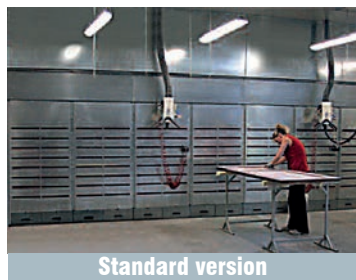

Standard version



Walls and roof extension




#### OPTIONAL ACCESSORIES

- Extraction ducts with silencers
- Extension of sidewalls and roof with 1000mm module
- Neon light IP 65, 1500 mm length with 2 x 58 W neon lamps
- Electric control board CE CRAM
- Painted extraction wall

#### NOTES

- Polyester filter cartridges
- Spark proof fan
- Differential manometer for indicating filters replacement
- Supplied as assembly kit
- Construction of extraction wall of galvanized steel sheet
- Technical characteristics and dimensions are given as indication and can be changed for improvement or update without notice

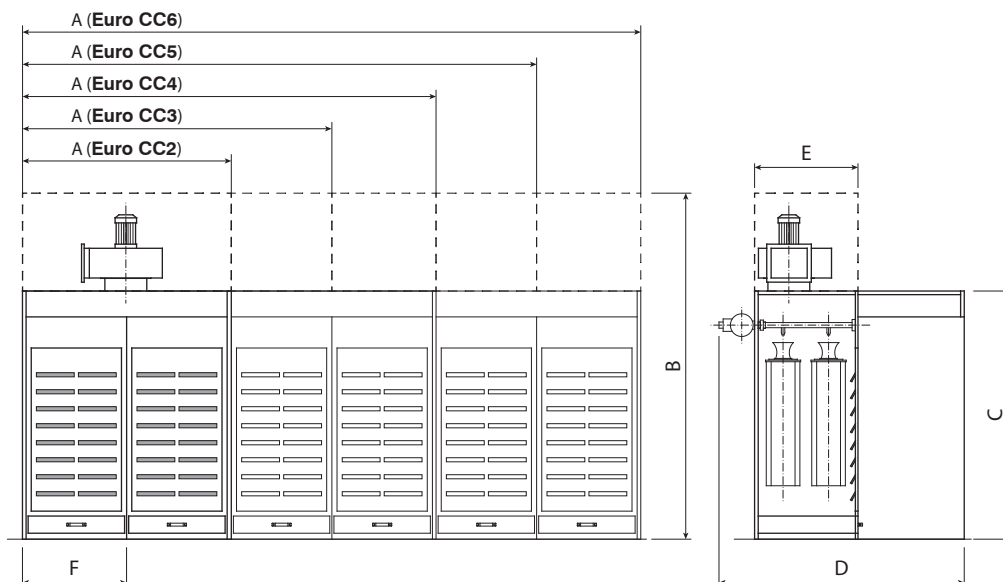

## DESCRIPTION OF EQUIPMENT

Model	Outside dimensions					
	A	B	C	D	E	F
Euro CC2	2.000	3.500	2.500	2.300	1.050	1.000
Euro CC3	3.000	3.500	2.500	2.300	1.050	1.000
Euro CC4	4.000	3.500	2.500	2.300	1.050	1.000
Euro CC5	5.000	3.500	2.500	2.300	1.050	1.000
Euro CC6	6.000	3.500	2.500	2.300	1.050	1.000

## TECHNICAL DATA

Model	Air flow rate	Fans	Electric power	Filter surface	Filter cartridges	Drawer capacity
	m <sup>3</sup> /h	n°	kW	m <sup>2</sup>	n°	litres
Euro CC2	8000	1	5,5	136	8	120
Euro CC3	12000	1	7,5	204	12	180
Euro CC4	16000	2	5,5	272	16	240
Euro CC5	20000	1+1	7,5+5,5	340	20	300
Euro CC6	24000	3	5,5	408	24	360